

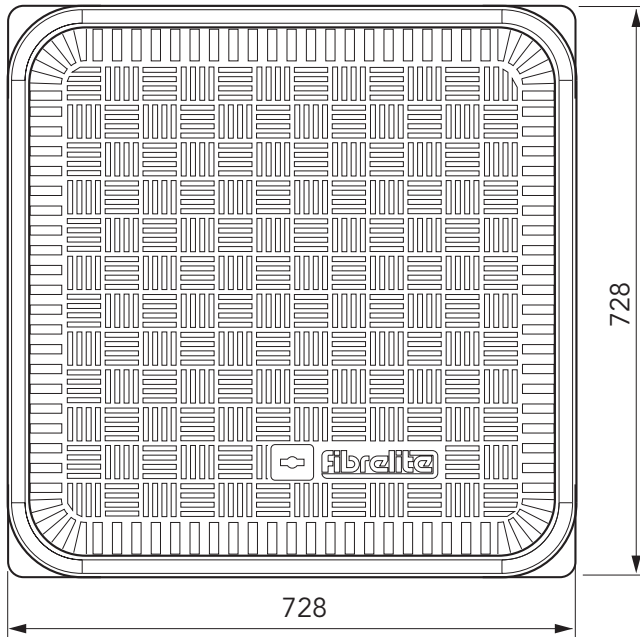


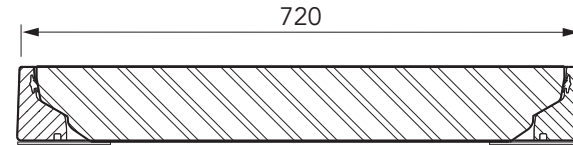

600mm x 600mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A  COMPANY

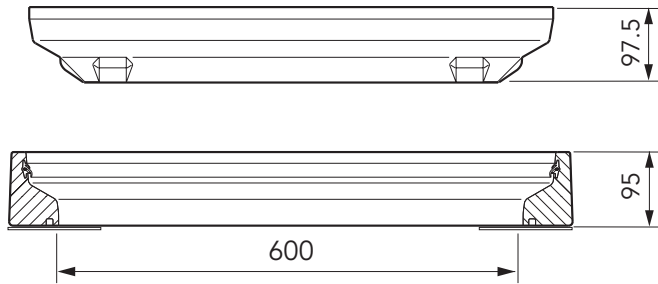

Load Rating	Cover Weight	Frame Weight
A15	10.5 Kg	11 Kg
B125	12 Kg	11 Kg
C250	20 Kg	11 Kg
D400	27 Kg	11 Kg
F900	35 Kg	11 Kg

600mm x 600mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY

CONCRETE


VERY IMPORTANT

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPORTANT


The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastics.

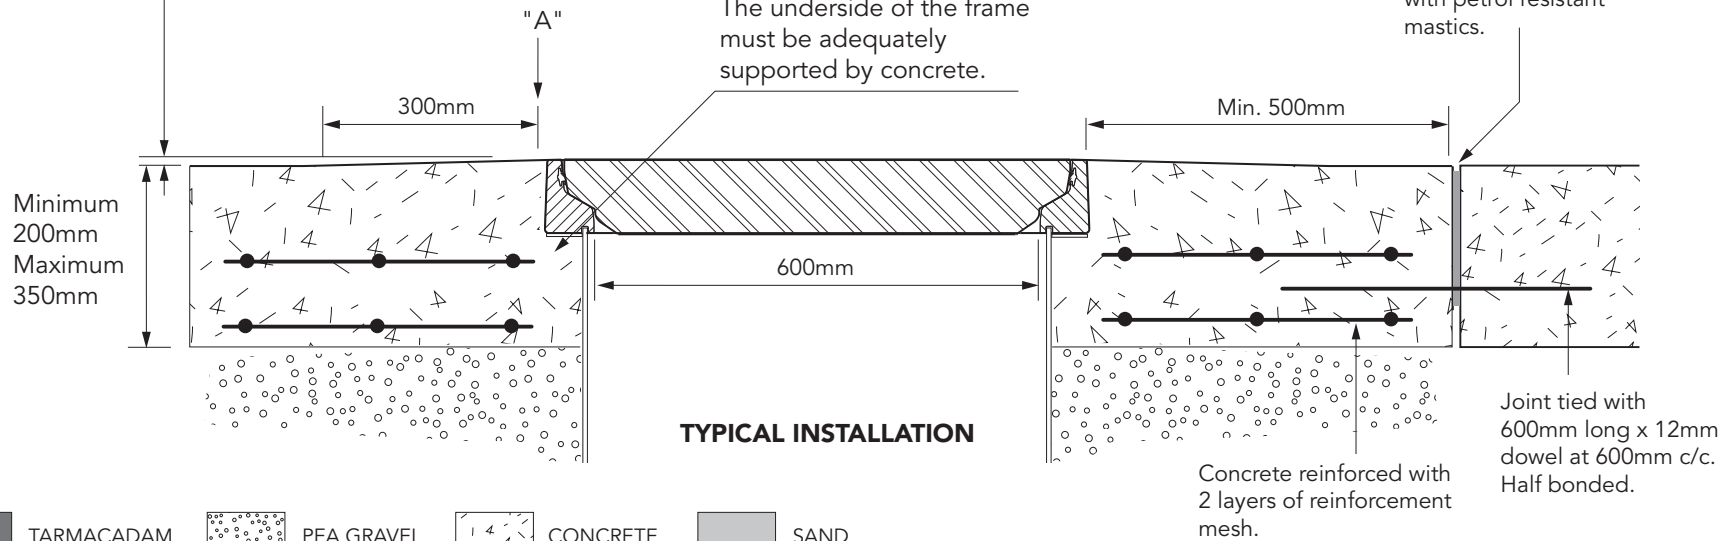


TYPICAL INSTALLATION

TARMACADAM

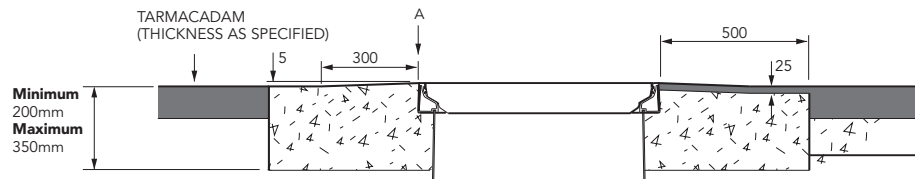

SETTS

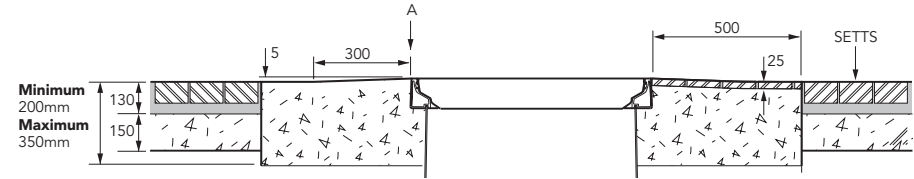

600mm x 600mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

