


1.2m eight sided solid base chamber, corbel, adjustable height skirt, watertight internal platform, 900mm dia. watertight flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



Issue: 11/06/2016 S12SB-390-WT Page: 1 of 4

© Copyright

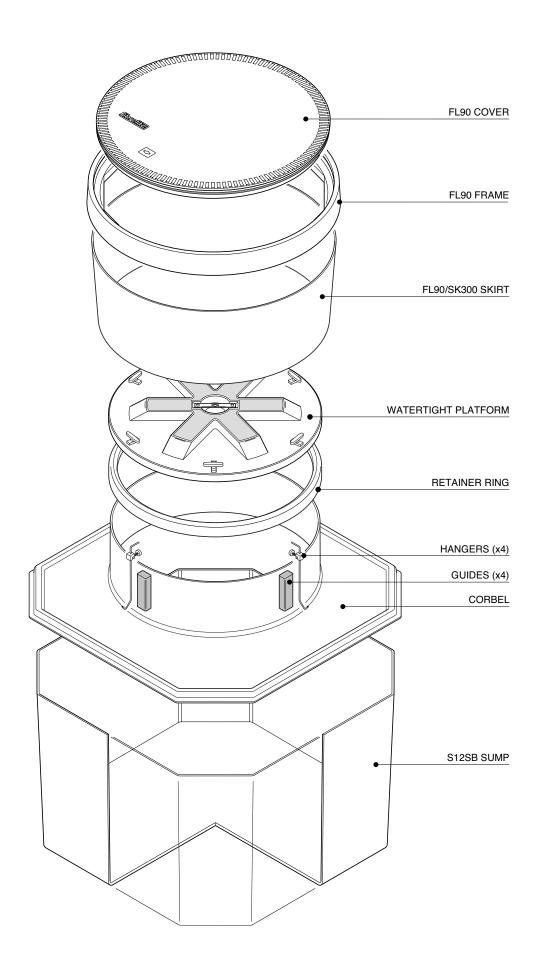


1.2m eight sided solid base chamber, corbel, adjustable height skirt, watertight internal platform, 900mm dia. watertight flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S12SB-390-WT Issue: 11/06/2016 Page: 2 of 4

© Copyright

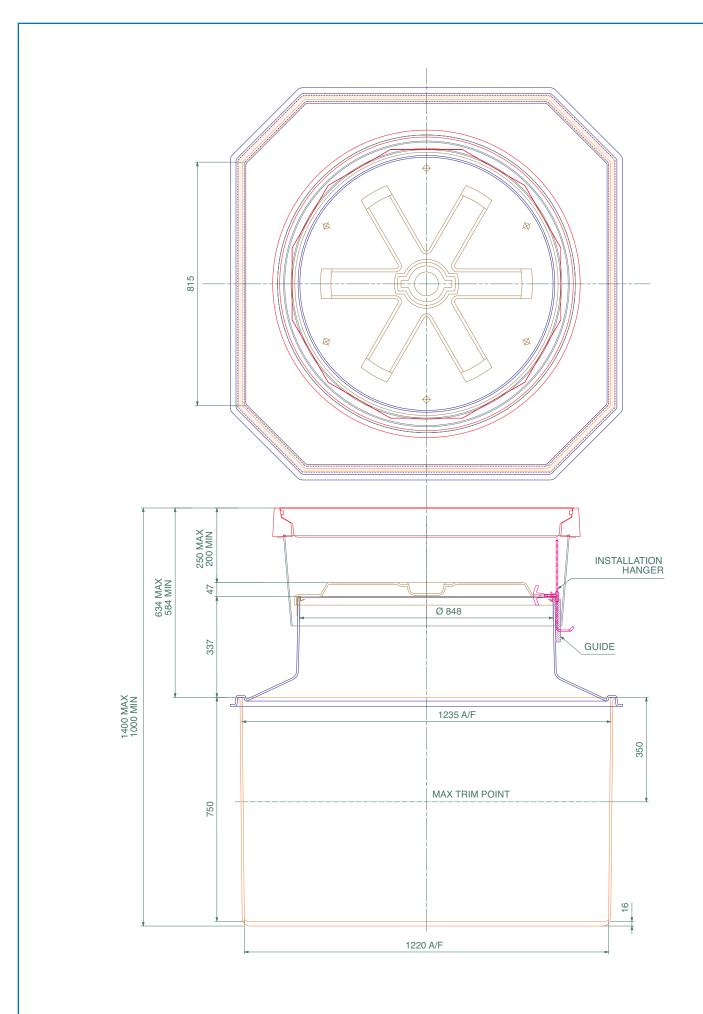

1.2m eight sided solid base chamber, corbel, adjustable height skirt, watertight internal platform, 900mm dia. watertight flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S12SB-390-WT Issue: 11/06/2016


Page: 3 of 4


© Copyright



TYPICAL INSTALLATION

CONCRETE

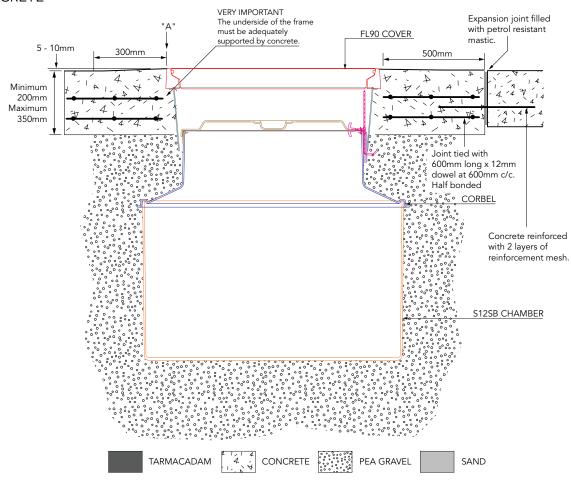

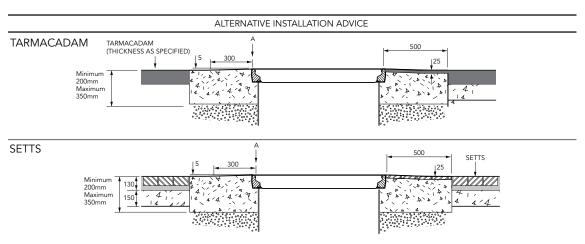

1.2m eight sided solid base chamber, corbel, adjustable height skirt, watertight internal platform, 900mm dia. watertight flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

© Copyright

FIBRELITE PART OF OPW A DOVER COMPANY

S12SB-390-WT Issue: 11/06/2016 Page: 4 of 4